


marantz®

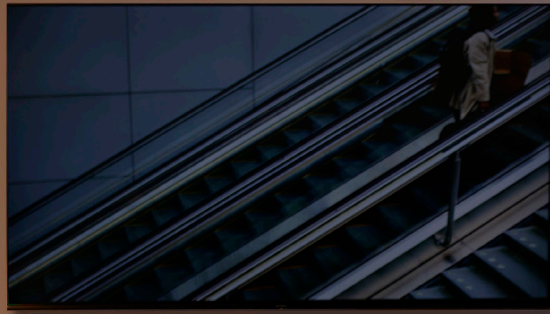

CINEMA 60

CINEMA 60 AV Receiver

High-performance 7.2 channel AV receiver with 100-watts-per-channel amplification, Dolby Atmos, DTS:X, 8K Ultra HD, and HEOS® Built-in streaming. CINEMA 60 is the new standard of foundational luxury home theater.

- Detailed and immersive sound transforms your listening room
- Beautiful design matches rich, warm sound
- 7.2 Channel output allows variety of speaker layouts
- 100-watts-per-channel amplifier creates realistic dynamics
- Decodes Dolby Atmos and DTS:X audio
- Acoustic room tuning with Audyssey MultEQ XT
- Six HDMI inputs (three 8K) and two outputs for highest-res video
- Proprietary HDAM analog electronics reveal incredible detail
- Attractive new on-screen menu makes setup intuitive
- Pre-amp outputs for all channels for amplifier upgrades



The Most Musical Sound

CINEMA 60

Technical Specifications



| Power Amplifier | |
|---|--|
| Number of Powered Channels | 7 |
| Power Output (8 ohm, 20 Hz–20 kHz, 0.08% 2ch Drive) | 100 W |
| Discrete Power Amplifier | Yes |
| Amplifier Topology | Class A/B |
| Current Feedback Topology | Yes |
| Bi-Amp Drive | assignable |
| Multichannel Surround Technologies | |
| DTS | DTS HD Master, DTS:X, DTS Neural:X, DTS Virtual:X |
| Dolby | Dolby TrueHD, Dolby Atmos, Dolby Atmos Height Virtualization, Dolby Atmos Music, Dolby Surround |
| Other | Multichannel Stereo |
| Max. Number of Processing (Pre-Amp) Channels | 7.1 |
| Inputs/Outputs | |
| Video | HDMI In / Out 6 / 2 Multi-Room Video Out via HDMI Yes |
| Audio | Analog In / Fixed Level Out 4 in / 0 out Phono (MM) In Yes Digital In: Optical / Coaxial 2 / 2 Multi-Room Out: Analog / Digital 1 / 0 Multichannel Pre-Amp Out 7.2 Subwoofer Out 2 7.1 Multichannel Input No |
| Other | Number of Speaker Terminals 7 Speaker A / B Assignable Multi-Room Speaker Terminal Assignable Front Inputs USB-A USB Audio Yes / No / No AM/FM Tuner Yes |
| HDMI | |
| Total HDMI Inputs / No. Support 8K | 6 / 3 |
| HDCP 2.3 Support | Yes |
| HDMI Outputs: Main / Zone | 2 / 1 |
| HDMI Upscaling | 1080p/4K to 8K |
| Max. Resolution / Frame Rate | 1080p/4K to 8K |
| Audio Return Channel | eARC |
| Video Dynamic Range | HDR / HLG / Dolby Vision / HDR10+ / Dynamic HDR |
| ALLM (Auto Low Latency Mode) Pass-Through for Gaming | Yes |
| HDMI Pass-Through in Standby Mode | Yes |
| CEC | Yes |
| Auto LipSync | Yes |
| Performance Technologies | |
| Copper-Plated Chassis | No |
| Toroidal Power Supply Transformer | No |
| Hyper Dynamic Amplifier Modules (HDAM) (List version) | Yes |
| Pure Direct Mode | Yes |
| Gold-Plated RCA Terminals | Yes |
| Clock Jitter Reducer | No |
| Acoustic / Room Correction | |
| Audyssey | MultiEQ XT |
| Audyssey Dynamic EQ / Dynamic Volume | Yes / Yes |
| Audyssey LFC | No |
| Dirac Live Support | No |
| Variable Cross Over | Yes |
| Optimized Bass Redirection | Yes |
| Bass Sync | No |

| Streaming Services | |
|---|--|
| HEOS Multi-Room and Streaming | Yes |
| AirPlay Audio Streaming | AirPlay 2 |
| Internet Radio | TuneIn |
| Spotify | Spotify Connect |
| Pandora | Yes |
| SiriusXM | Yes |
| Other Streaming Services | Amazon Music HD/ Amazon Music / TIDAL / Deezer / iHeart Radio / Napster / Soundcloud / Mood Mix |
| Room-Tested | Yes |
| Network Connectivity | |
| Ethernet Ports | Yes |
| Wi-Fi | Yes |
| Bluetooth | Yes |
| Bluetooth Re-Transmit for Bluetooth Headphones | Yes |
| Smart Home Integration and Control | |
| Voice Assistant Compatibility | Alexa / Google Voice Assistant / Apple HomePod / JoshAi |
| App for Smart Phones & Tablets (iOS/Android) | Marantz AVR App |
| HEOS Multi-Room Integrated | Yes |
| HEOS Link Compatibility: IR / IP | Yes / Yes |
| Multichannel Zones | 2 |
| Zone Audio Source: HDMI / Opt. Coax / Network, USB / Analog | 2 Ch / 2 Ch / Yes / Yes |
| Zone Audio Output: Speaker / Pre-Out | Yes / Yes |
| Control Connectivity | IP Control / RS232 Control / Web Control / App Control |
| IR Flasher In | Yes |
| Marantz Remote Bus | Yes |
| DC Trigger Output | 1 |
| HDMI Diagnostics | Yes |
| Other | |
| Front Display | Port Hole OLED |
| GUI Languages | English, Spanish, French |
| Setup Assistant | Yes |
| Smart Select on Remote | Yes |
| Firmware Update by Network / USB | Yes / Yes |
| ECO Mode | Yes |
| Auto Power Off | Yes |
| Sleep Timer | Yes |
| General | |
| Metal Front Panel | No |
| System Remote Control | RC-049SR |
| Power Consumption in W | 650 W |
| Power Consumption, No-Sound in W (ECO on / off) | 45 W / 75 W |
| Standby Consumption in W | 0.2 W |
| CEC Standby Consumption in W | 0.5 W |
| Maximum Dimensions | Antenna, Horizontal: (W × D × H) 17.4 × 13.9 × 6.5 in. Antenna, Vertical: (W × D × H) 17.4 × 13.9 × 9.3 in. w/o Antenna: (W × D × H) 17.4 × 13.5 × 6.5 in. |
| What's in the box | Main unit, remote control, batteries, AM/FM antennas, wire labels, quick start guide, Audyssey microphone, card board microphone stand, 2 External Detachable Antenna, AC cord |
| Weight in lbs. | 24 lbs. |
| UPC | 747192138714 |

Design and specifications are subject to change by Marantz without notice.

www.marantz.com